


CRT48-35L

Ride-on Trowels



**WACKER
NEUSON**
all it takes!

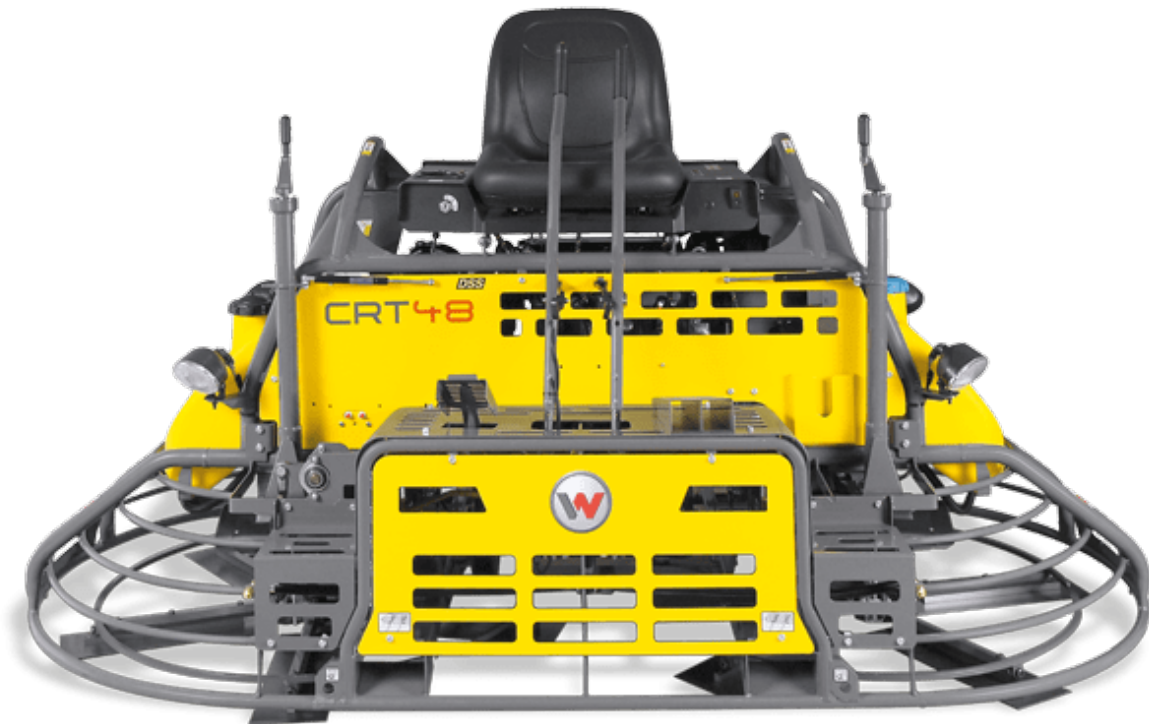

The best solution for your concrete construction sites: CRT48

The models of Wacker Neuson's CRT 48 trowel range feature a finishing diameter of 1220 mm. They deliver best results with maximum productivity. Their distinguishing feature is a superior steering system, which makes steering easier and thus prevents early user-fatigue. In addition, the rigid frame ensures excellent steering control. Combined with the ergonomic 2-lever controls it achieves optimum maneuverability.

- Sensitive, ergonomically designed 2-lever controls
- Optimum maneuverability thanks to its balanced power-to-weight ratio
- Variable coupling: For constant engine torque at low and high rotor speeds
- Good visibility thanks to front and rear lights as standard – especially in low light operations

CRT48-35L Technical specifications

L x W x H	2566 x 1295 x 1473 mm
Weights	
Operating weight	603 kg
Troweling diameter	1,220 mm
Quantity of blades	10
Blades	457 x 152 mm
Combination blades	457 x 203 mm
Combination blades	457 x 254 mm
Pitch range	0 - 25 °
Rotor speed (min. / max.)	25/150 rpm
Engine / Motor	Liquid-cooled four-cylinder four-cycle diesel engine
Engine / Motor manufacturer	Kohler
Displacement	1,370 cm ³
Operating performance	26.0 (35.0) kW (hp)
RPM / speed	3,800 rpm
Fuel consumption	24.6 l/h
Tank capacity	6.2 l

Please note: that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.
Copyright © 2019 Wacker Neuson SE.